




Radiy delivers a digital I&C platform that is robust, flexible, and scalable. It provides state-of-the-art functions, services, and safeguards for applications in industry.

The RadICS B product line consists of a Logic Module, basic input/output modules, and specialty modules all housed in a chassis.

The Analog Inputs Module (AIM) serves as a high-density analog field sensor acquisition module. It provides for 32 independent, highly reliable, and galvanically isolated inputs with built-in filtering and calibration to be used by the Logic Module. The AIM also performs robust and continuous self-diagnostics to ensure the safety and integrity of each output and module function.

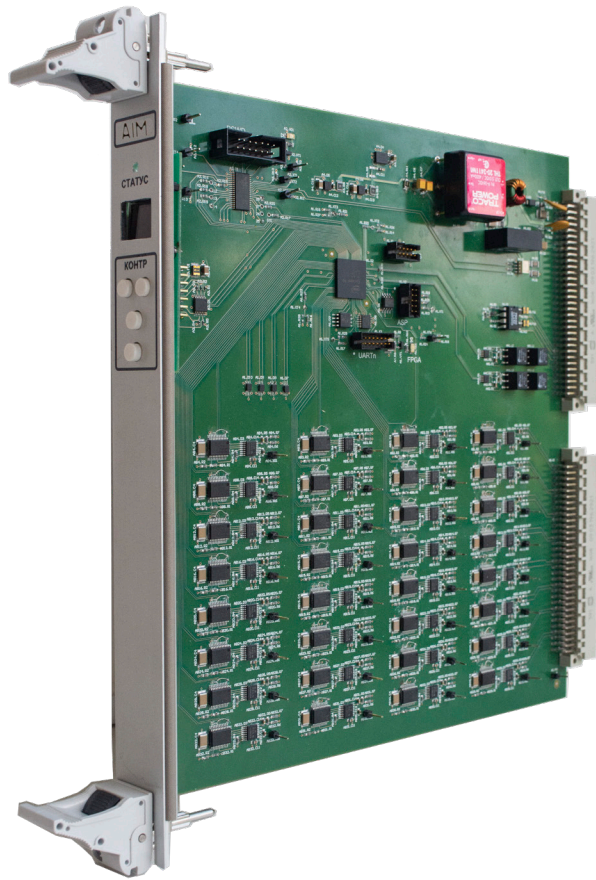

Analog Inputs Module (AIM)

- High density 32 channel analog inputs with built-in hardware redundancy and self-diagnostics for highly reliable operation, filtering, calibration, and random hardware failure detection.
- Independent FPGA for analog input processing, self-diagnostics and microcontroller for power control and fail-safe functional behavior.
- IEC 61508 SIL 2 certification in single and multiple channel configurations.
- Segregation of output processing, self-diagnostics, and watchdog functions assures safety-critical functionality.
- Galvanic isolation for signal inputs with robust and dedicated communication links to Logic Module for secure data transfer.
- Inherent on-board diversity features eliminate common cause failure vulnerabilities.
- FPGA technology ensures resilience to obsolescence.



Analog Inputs Module Technical Specifications

Input Analog Signal Range	0 to ± 5.1 V 0 to ± 10.2 V Differential input impedance: not less than 1 megohm
A/D Conversion Resolution	18 bit
Overall Accuracy	0.05% of full scale for all ranges (at 25 °C)
Input Channel Isolation	all input channels are galvanic-isolated up to 250 V RMS AC or 250 VDC field-to-Chassis and channel-to-channel
Overvoltage Protection	up to ± 30 VDC/VAC continuous
Information Package Exchange Cycle	5 milliseconds
Diagnostic Package Exchange Cycle	5 milliseconds
LVDS Line Speed	100 megabit/second
LVDS Line Protocol	proprietary protocol with integrity checking (CRC), galvanic-isolated Tx / Rx
Self-Diagnostic Functions	diverse watchdog unit, checksum analysis, active diagnostics with internal fault detection, hardware error detection, functionally diverse continuous self-diagnostic tests, power supply fault detection
Power Supply / Consumption	2 independent inputs – 24 (18 – 36) VDC / 0.4 amp
Indications	Bicolour status LED indicator (STATUS); 64x48 graphical OLED indicator for providing current operational mode, service information, and error codes
Operating Temperature	4.4 to 60 °C (32 to 140 °F)
Operating Humidity	10 to 90% relative humidity, non-condensing

Research & Production
Corporation Radiy
29 Akademika Tamma Street,
Kropyvnytskyi 25009, Ukraine
inter.project@radiy.com
www.radiy.com

For more than 20 years Radiy has provided advanced instrumentation and control (I&C) solutions for nuclear power plant modernization and new build projects in the global market. Radiy's main I&C product, the RadICS I&C Platform, was developed specifically for use in nuclear power plants. It is the only FPGA-based I&C platform with a SIL 3 certification in a single channel configuration. Radics, a wholly owned LLC, provides delivery services for the RadICS I&C Platform for international markets to meet local regulatory requirements. Radiy also offers industrial control systems, electrical equipment, and reverse engineering services.